




GIYO

HIGH PRESSURE ALUM FLOOR PUMP

GIYO CLEVER-TWIN-VALVE

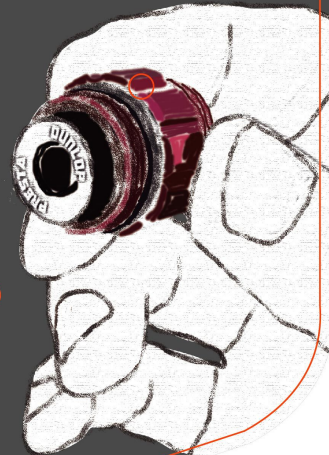

GF-15S
max.240 psi

2.5" gauge •
Clever-Twin-Valve for Schrader, Presta
and Dunlop
With air-bleeder

GF-15SP
max.200 psi

2-Tone handle •
2.5" gauge •
Clever-Twin-Valve for Schrader, Presta
and Dunlop
With air-bleeder

GF-15S3
max.260 psi

Oversized 3" big gauge •
Clever-Twin-Valve for Schrader •
Presta and Dunlop
With air-bleeder

GF-16
max.240 psi

Classical
wooden handle
2.5" gauge
Clever-Twin-Valve
for Schrader, Presta
and Dunlop
With air-bleeder

GF-71HP
max.260 psi


Oversized 3"
big gauge
Clever-Twin-Valve
for Schrader,
Presta and
Dunlop

Made in Taiwan

GIYO

HIGH PRESSURE ALUM FLOOR PUMP


INSTRUCTION




▲ Clever-Twin-Valve



Choose correct pump valve.



Insert pump head to tire valve.



Flip up lever.

(4) After inflating desired pressure, unlock the lever and take the pump head off the tire.