

GIYO


ALUM MINI PUMP W/THUMB-LOCK CLEVER-TWIN-VALVE

CNC MACHINING

GM-55I
/C/R

GM-56I
M/C/

GM-57I
M/C/R

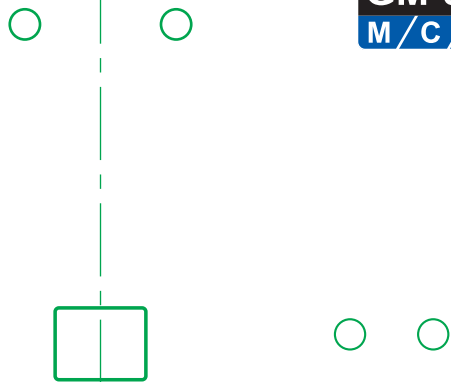

GIYO

ALUM MINI PUMP W/THUMB-LOCK CLEVER-TWIN-VALVE

CNC MACHINING

GM-55I
/C/R



GM-56I
M/C/

GM-57I
M/C/R


Features

- Aluminum handle and barrel
- Thumb-Lock Clever-Twin-Valve for Schrader, Presta, Dunlop & E/V
- Extractable hose
- Max. pressure 120 psi (GM-55I)
- Max. pressure 80 psi (GM-56I)
- Max. pressure 100 psi (GM-57I)


Instruction

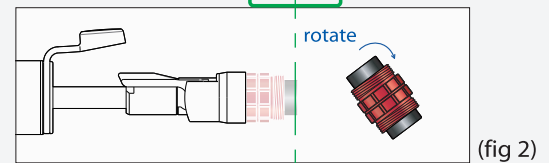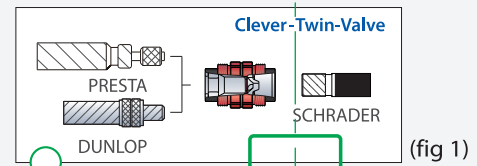

1. Pull pump head out of the handle hole.
2. First choose pump head side (Presta/Dunlop or Schrader) insert into tyre valve then lift up the alum lever to lock. (fig 3)
3. Inflate.

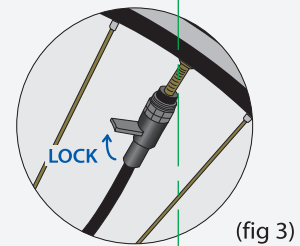


GM-55I



GM-56I



GM-57I



Made in Taiwan