


GIYO

W/EXTRACTABLE HOSE

MAX. 80 PSI

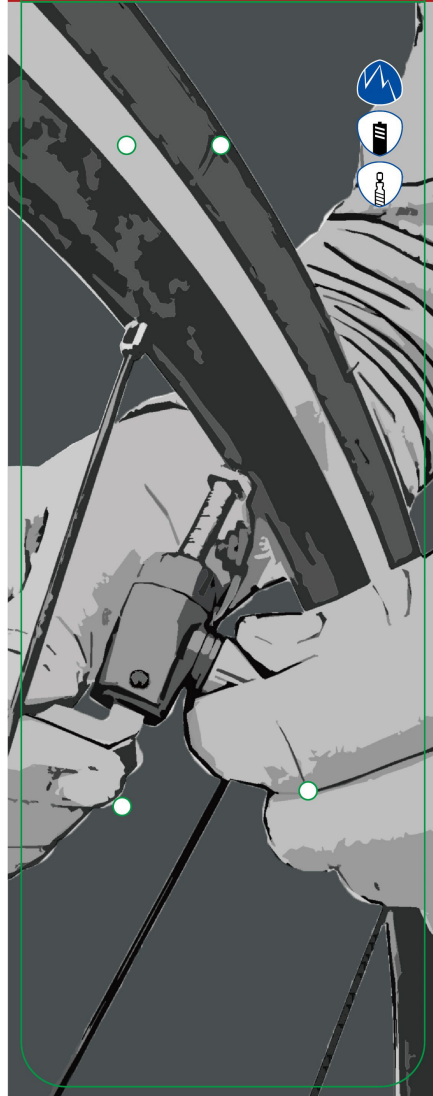

GIYO

W/EXTRACTABLE HOSE

MAX. 80 PSI

 GP-862E
max. 80 psi


 GP-863E W/GAUGE
max. 80 psi

- Aluminum barrel
- Extractable hose
- Reversible Presta and Schrader

 GP-86SE
max. 80 psi

 GP-86PP ALUM LEVER
max. 80 psi


- Extractable hose
- Reversible Presta and Schrader




All-round gauge

GP-863E

Instruction



SCHRADER PRESTA



(1) Engage to the valve of tire.
Push down the lever to lock the valve.



(2) Push locking-ring toward pump end-cap direction until handle won't touch locking-ring, then inflate.

(3) After inflating desired pressure, unlock the lever and take the pump head off the tire.

Made in Taiwan