


GIYO

W/EXTRACTABLE HOSE

MAX. 120 PSI

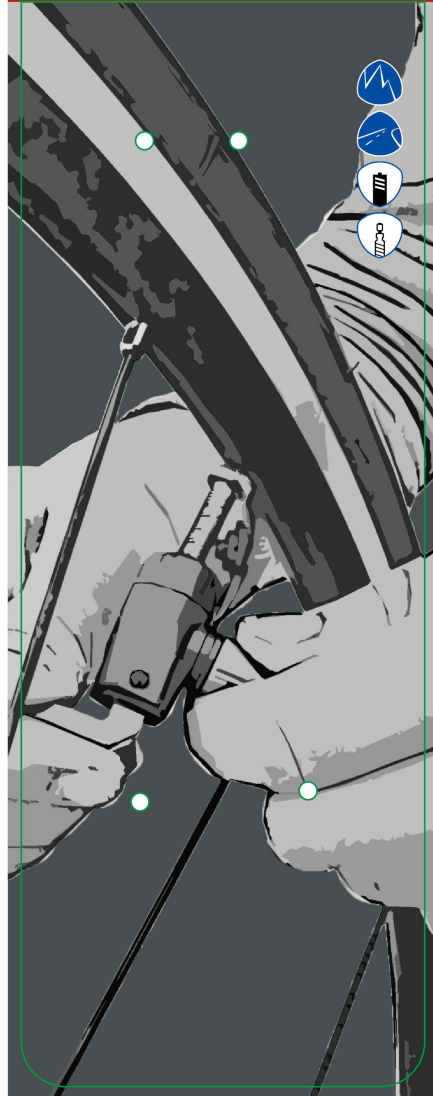

GIYO



W/EXTRACTABLE HOSE

MAX. 120 PSI

- | | |
|---|--|
| <input type="checkbox"/> GP-872E
max. 120 psi | <input type="checkbox"/> GP-873E W/GAUGE
max. 120 psi |
| <input type="checkbox"/> GP-87SE
max. 120 psi | <input type="checkbox"/> GP-87EP ALUM LEVER
max. 120 psi |
- Aluminum barrel
 - Extractable hose
 - Reversible Presta and Schrader



Instruction



Engage to the valve of tire.
Push down the lever to lock the valve.



Push locking-ring toward pump end-cap direction until handle won't touch locking-ring, then inflate.

(3) After inflating desired pressure, unlock the lever and take the pump head off the tire.

Made in Taiwan