GIYO GS41,GS41D,GS41P 卡片　規格:90 x 330mm　　110/09/23

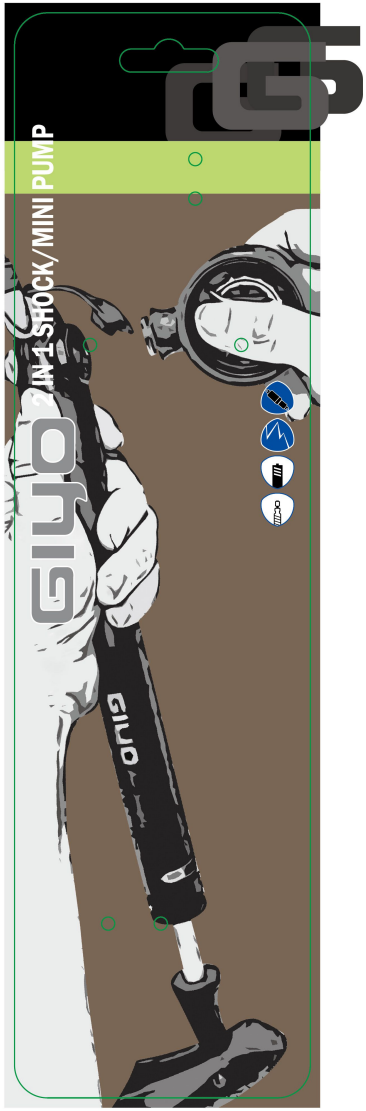

☐ **GS-41** 100psi ,300psi

☐ **GS-41D** Dual Face Gauge 100psi ,300psi

- Removable gauge
- 2 in 1 for suspension shock and tire
- Non-scratch sealed rubber system on pump head
- Precise-adjust button 1-2PSI air pressure control for per push
- Rotary hose design
- Attached with Presta adaptor

☐ **GS-41P** 100psi ,300psi

- 2 in 1 for suspension shock and tire
- Non-scratch sealed rubber system on pump head
- Precise-adjust button 1-2PSI air pressure control for per push
- Rotary hose design
- Attached with Presta adaptor



GS-41/GS-41D

▲Removable Gauge



▲Choose shock or tire mode



▲T-Handle

Instruction

(1)

Choose shock or tire mode

(2)

Screw-in the pump head until tighten the valve then inflate.

(3)



Press the air-bleeder button, micro-adjust to desired pressure

(4) Unscrew the pump head and detach from the valve

Made in Taiwan