


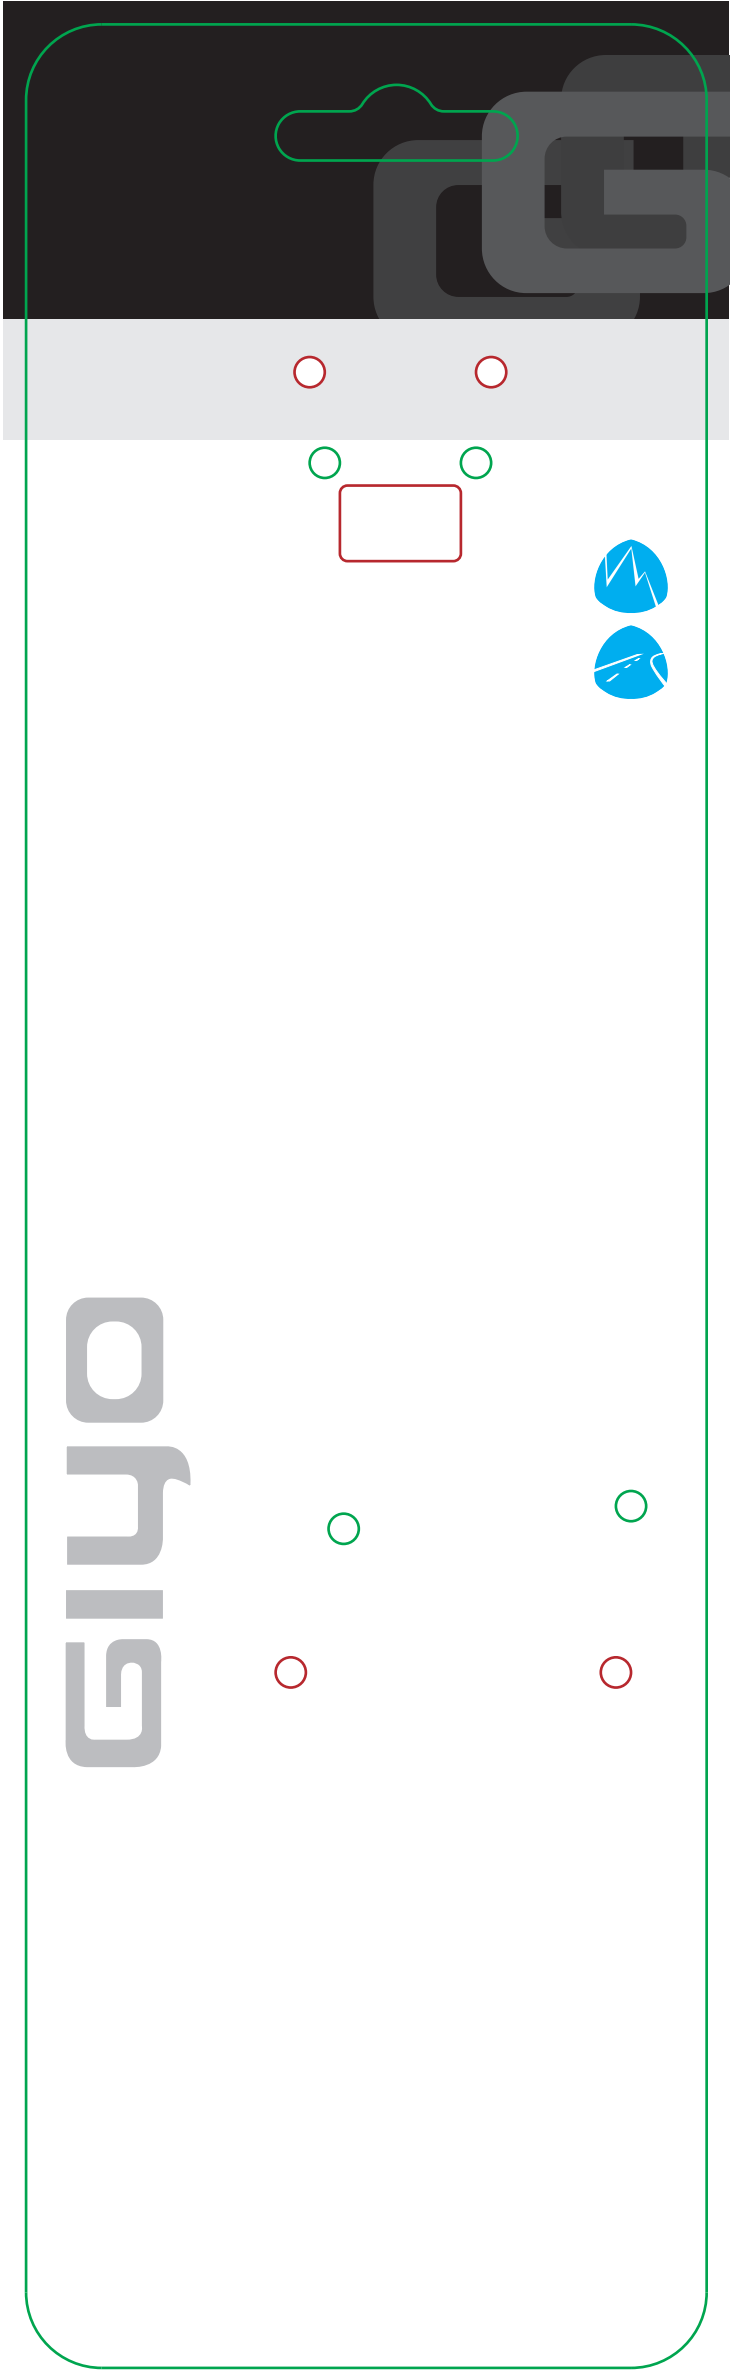

OPEN

① Push
② CLOSE

GP-48DH/GP-47CA

☐ **GP-43DH** 1.5" Dial Gauge
max. 120 psi

☐ **GP-44DH** 1.5" Dial Gauge
max. 120 psi

☐ **GP-48DH** 1.5" Dial Gauge
max. 120 psi

- Dual-Hole valve for Presta, Schrader and Dunlop
- Alum barrel
- T-Handle

- Anti-pinch T-Handle w/safety lock

Instruction

▲ Dual-Hole valve

(1) Choose correct pump valve and insert it to tire valve.

(2) Lift up the lever to lock the valve, then inflate to desired pressure.

(3) Unlock the lever and take the pump head off the tire.

☐ **GP-47CA** 1.5" Dial Gauge
max. 100 psi

☐ **GP-47CA** 1.5" Dial Gauge
max. 100 psi

- Anti-pinch T-Handle w/safety lock
- Clever Valve: Automatically change for Presta and Schrader
- Alum barrel

Instruction

▲ Clever Valve

(1) Insert pump head to tire valve.

(2) Flip up the lever to securely hold the valve, then inflate.

(3) After inflating desired pressure, unlock the lever and take the pump head off the tire.

Made in Taiwan