

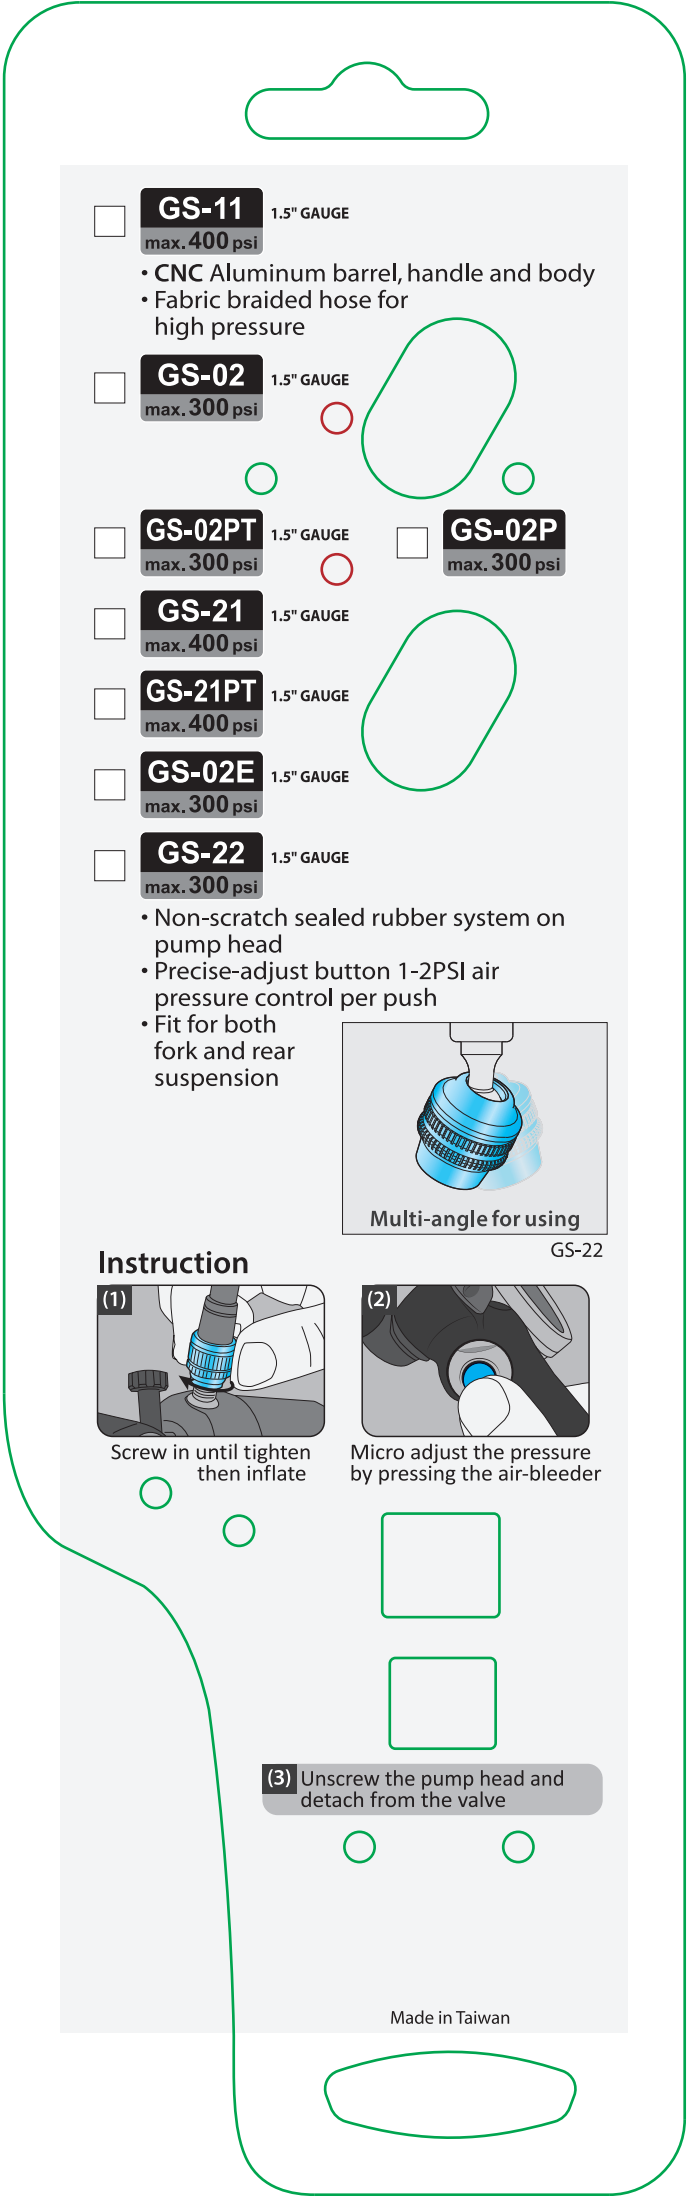


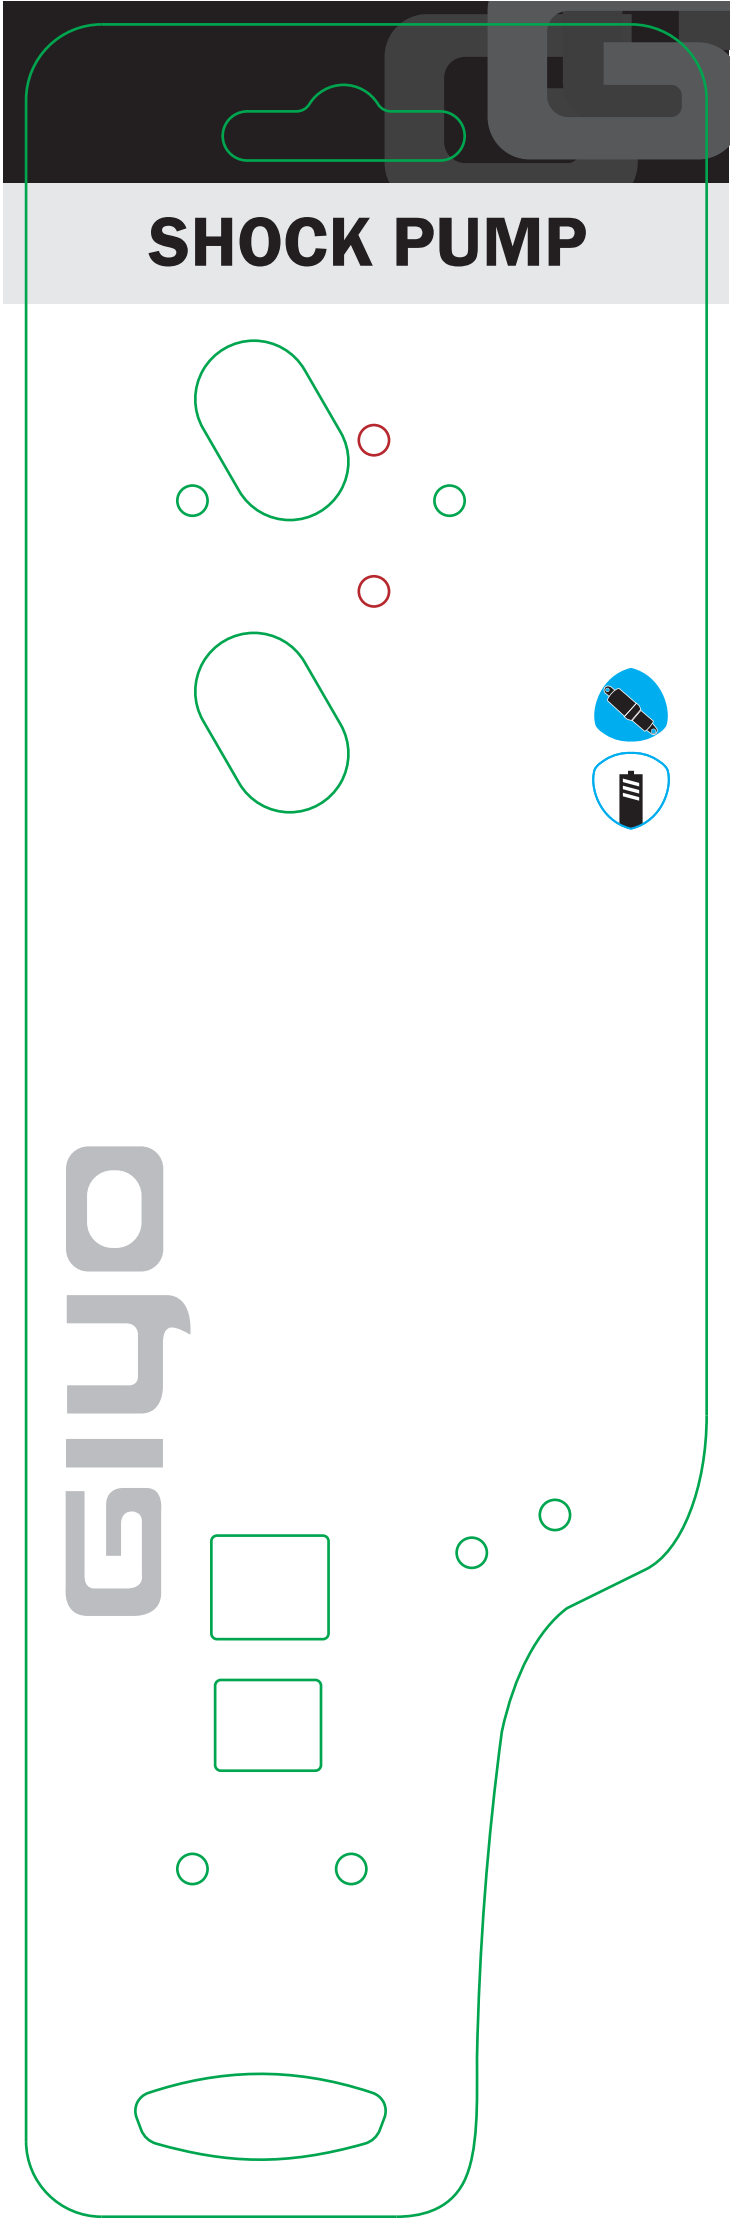


- ☐ **GS-11** 1.5" GAUGE
max. 400 psi
• CNC Aluminum barrel, handle and body
• Fabric braided hose for high pressure
- ☐ **GS-02** 1.5" GAUGE
max. 300 psi
- ☐ **GS-02PT** 1.5" GAUGE
max. 300 psi
- ☐ **GS-02P** 1.5" GAUGE
max. 300 psi
- ☐ **GS-21** 1.5" GAUGE
max. 400 psi
- ☐ **GS-21PT** 1.5" GAUGE
max. 400 psi
- ☐ **GS-02E** 1.5" GAUGE
max. 300 psi
- ☐ **GS-22** 1.5" GAUGE
max. 300 psi
• Non-scratch sealed rubber system on pump head
• Precise-adjust button 1-2PSI air pressure control per push
• Fit for both fork and rear suspension



GS-22

Instruction



(1) Screw in until tighten then inflate



(2) Micro adjust the pressure by pressing the air-bleeder

(3) Unscrew the pump head and detach from the valve

Made in Taiwan